

Town of Centreville-Wareham-Trinity

PO Box 130, Centreville, NL AOG 4PO

Tender Request


The Town of Centreville-Wareham-Trinity is seeking quotes to prep, place concrete & crushed stone at the War Memorial Site near the Central Arena.

The quote is for the following:

- The concreted area must be prepped with a well bed of tamped crushed stone before concrete mixture is poured.
- Cement should be 30 MPA with hardener & using standard rebar
- An area of concrete for the memorial base (120" x 30") will be a thickness of 12" and all other areas should be 6" thick.
- Council is looking to have contractors quote for both stamped concrete and regular concrete, both to have 3 crosses stamped into the concrete, color to be determined. A drawing is attached to this quote for reference.
- Concrete to be kept wet during curing process.
- 4" Red Crushed stone to be placed in the areas around the walkways

Any contractor interested in bidding on this tender is asked to contact the town office.

Lowest or any quote not necessarily accepted

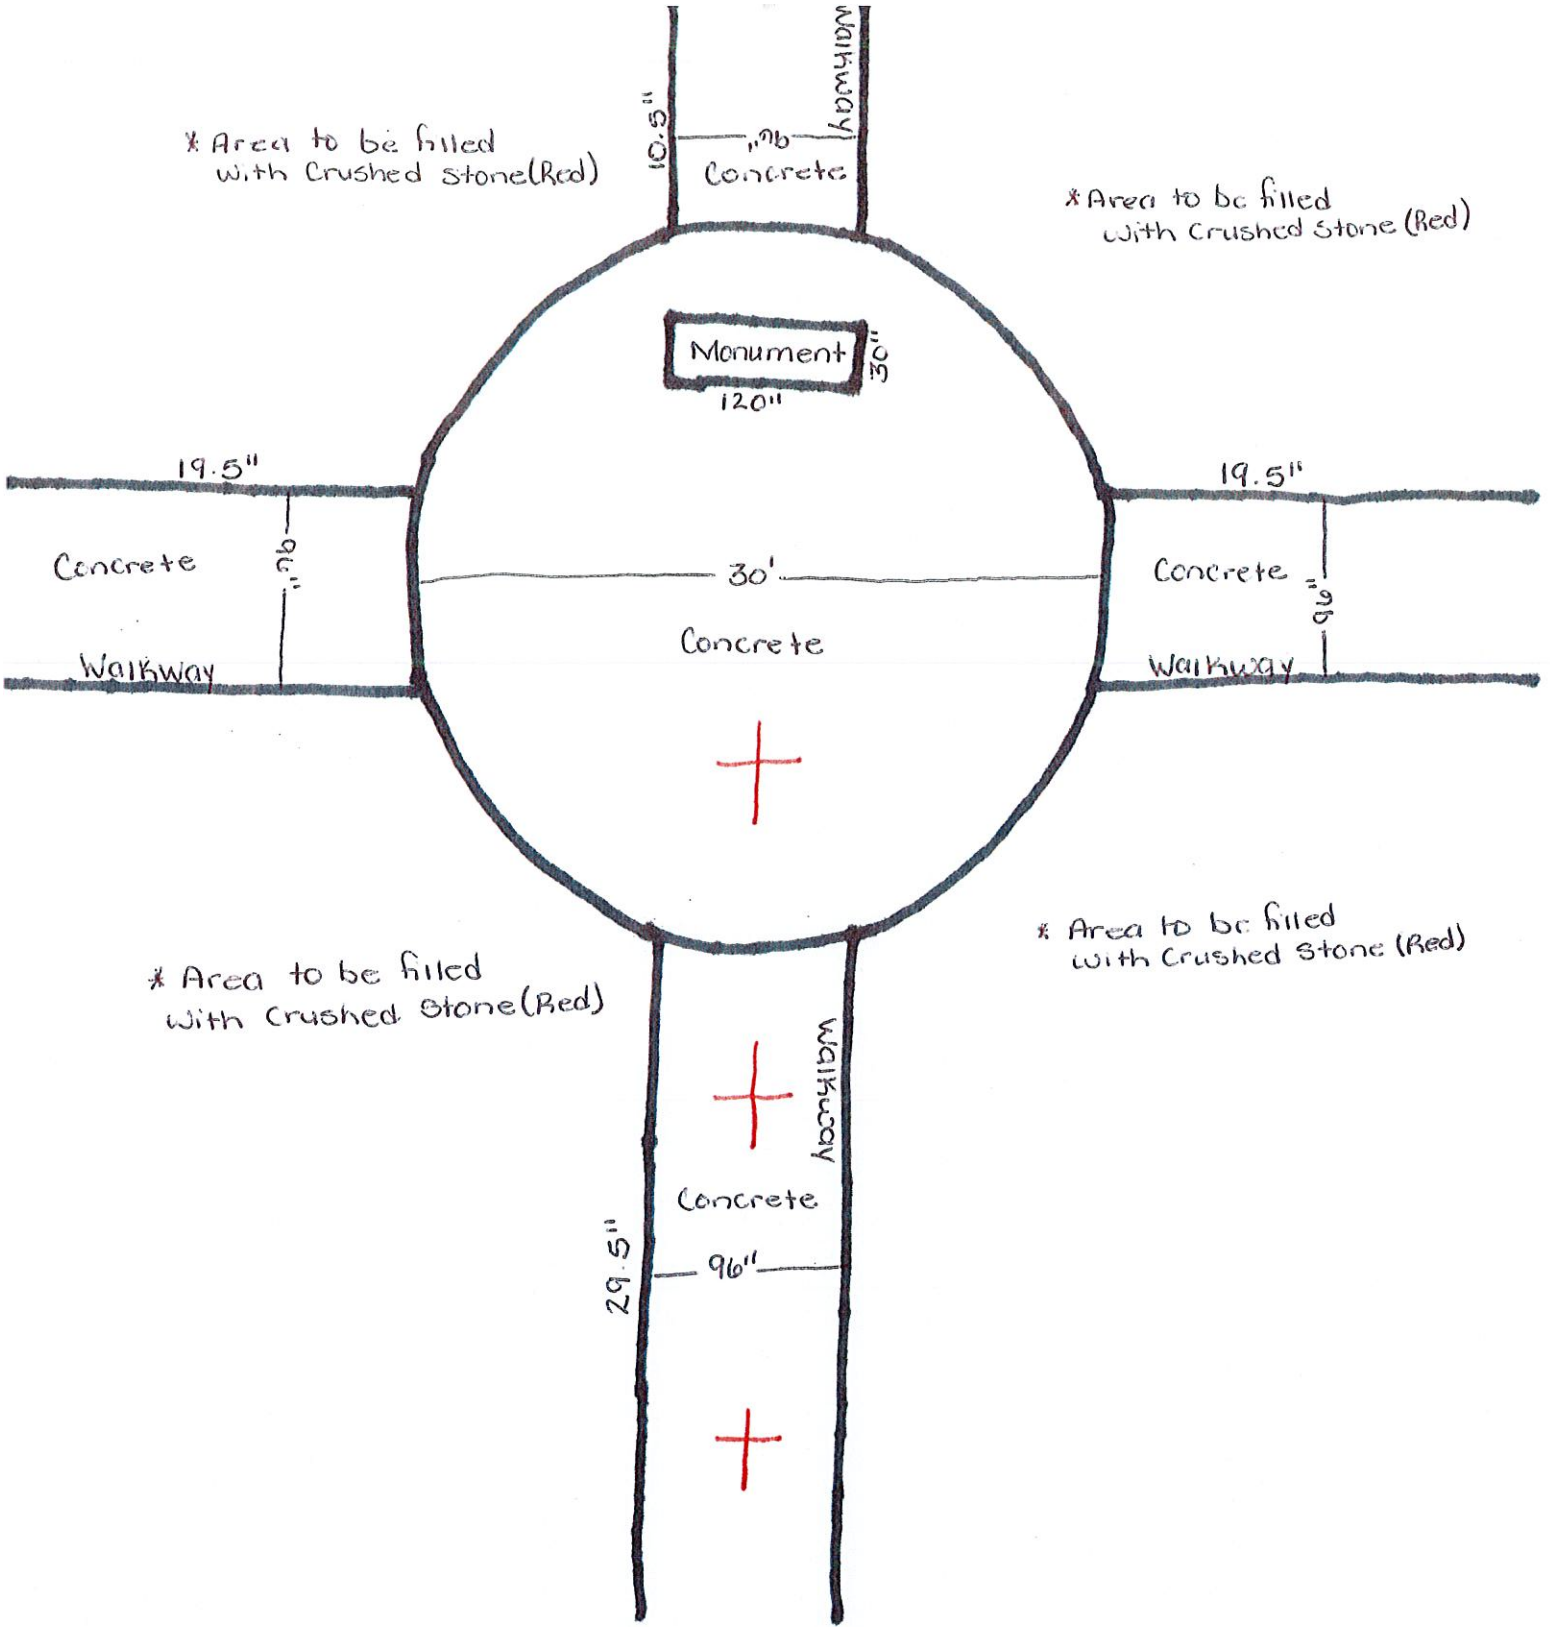

- Cement Should be 30 MPA with hardener + standard rebar
- Area of 120" x 30" under monument should be 12" thick.
- All other areas beside area specified should be 6" thick