

# Town of Centreville-Wareham-Trinity

PO Box 130, Centreville, NL AOG 4PO

---

## Tender Request

---

The Town of Centreville-Wareham-Trinity is seeking quotes to prep & place concrete at the War Memorial Site near the Central Arena.

The quote is for the following:


- The concreted area must be prepped with a well bed of tamped crushed stone before concrete mixture is poured.
- Cement should be 30 MPA with hardener & using standard rebar
- An area of concrete for the memorial base (120" x 30") will be a thickness of 12" and all other areas will be 6" thick.
- Council is looking to have 3 crosses stamped into the concrete, color to be determined. A drawing is attached to this quote for reference.
- Concrete to be kept wet during curing process.

Any contractor interested in bidding on this tender is asked to contact the town office to schedule a site visit. A site visit will be mandatory before bids will be accepted. Any Bid must be in sealed envelope and dropped to the town office by 12:00 p.m. by March 31<sup>st</sup>, 2023.

Lowest or any quote not necessarily accepted

Tel: (709) 678-2840 Fax: (709) 678-2536

[townofcwt@bellaliant.com](mailto:townofcwt@bellaliant.com)  
[www.townofcwt.com](http://www.townofcwt.com)

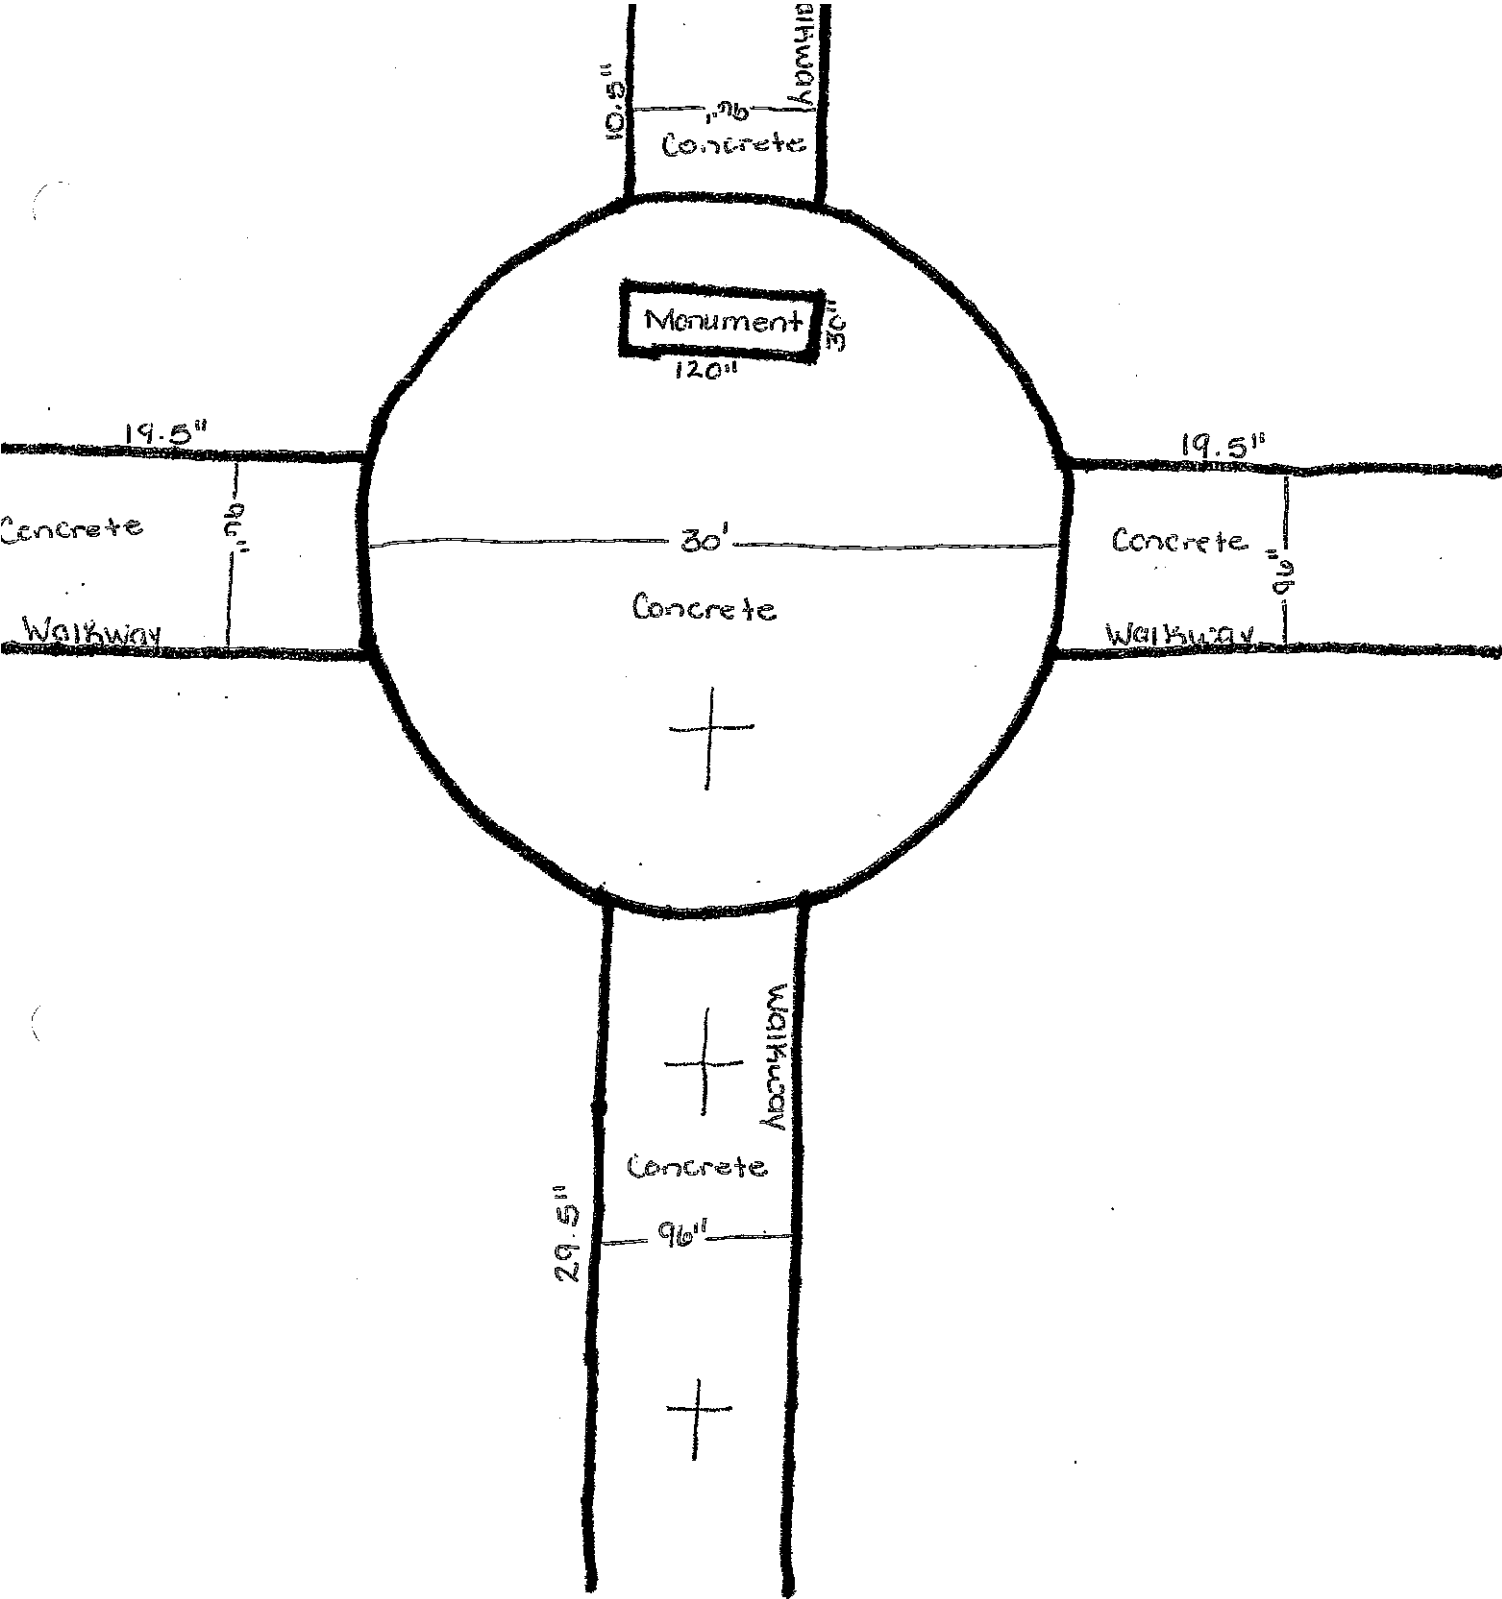

- Cement Should be 30 MPA with hardener + standard rebar
- Area of 120" x 30" under monument Will be 12" thick.
- All other areas beside area specified will be 6" thick